

30W LED SOLAR SOKAK ARMATÜR 9350

Kullanım Alanları

- Bahçeler
- Otoparklar
- Spor Alanları
- Sokaklar



Genel Özellikler

Gövde Materyali	: ABS Plastik
Ürün Rengi	: RAL 9005
Darbe Dayanımı	: IK06
IP Seviyesi	: IP65
Çalışma Sıcaklığı	: -25°C ~ +50°C
LED Ömrü	: 30.000 saat
Ürün Ömrü	: 30.000 saat
Sensör & Algılama Mesafesi	: Hareket Sensörü & 5-8m
Dim Özelliği	: Dim Edilebilir
Montaj Tipi	: Direğe Montaj

Solar Panel Özellikleri

Panel Tipi	: Polikristal
Panel Voltajı	: 6V
Panel Gücü	: 8W
Kontrol Ünitesi	: Uzaktan Kumanda


Elektriksel Özellikler

Güç	: 30 W
Pil Tipi	: LiFePo4
Pil Voltajı	: 3.2V
Pil Kapasitesi	: 6000mA
Şarj Süresi	: 6 - 7 saat
Çalışma Süresi	: 12 - 16 saat
Koruma Sınıfı	: III

EU 2019/2015 Enerji verimliliği direktifine göre güç ve ışık akısı değerleri için ±10% tolerans mevcuttur.



Optik Özellikler

Işık Akısı	: 600 lm
Renksel Geriverim Endeksi CRI	: ≥ 80
Işık Açısı	: 120°
Işık Kaynağı	: Mid Power LED
Renk Sıcaklığı	: 6500K

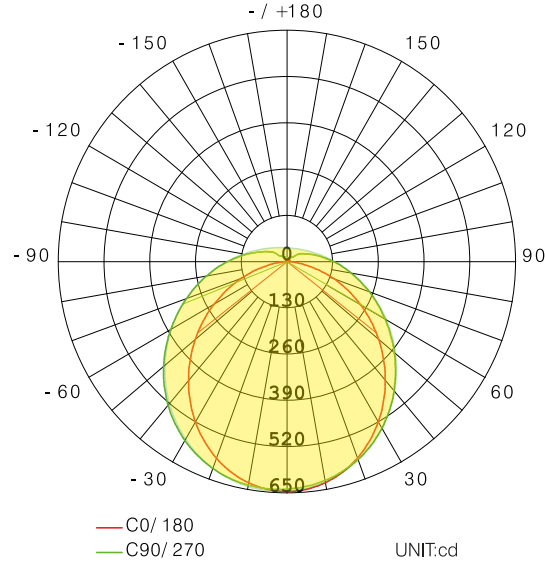

Işık Şiddeti Dağılım Eğrisi (Polar)

Boyutlar & Ağırlık









a	b	c	Ağırlık
190mm	360mm	55mm	1000g

Paketleme Verisi

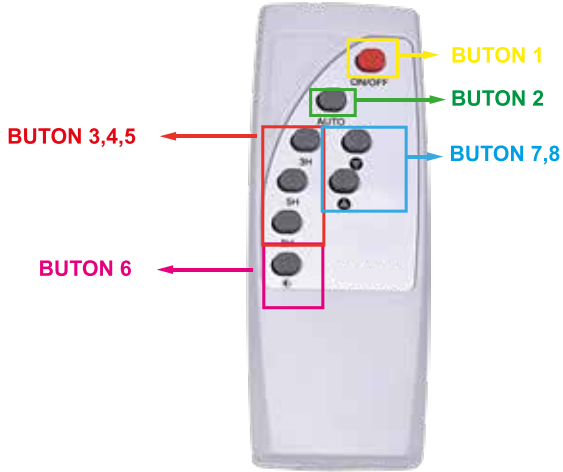Ürün Kodu	Kutu İçi Miktar (adet)	Koli İçi Miktar (adet)	Koli Boyutları (en x boy x yükseklik) (mm)	Koli Ağırlığı (kg)
9350	1	10	335 x 400 x 380	10,2

Uzaktan Kumanda Pin Diyagramı



<p>BUTON 1 AÇ/KAPAT</p>	
<p>BUTON 2 OTOMATİK MOD</p> <p>Bu modda sensör algıladığında ürün %100 ışık verir, sensör algılamadığında %30 ışık verir.</p>	
<p>BUTON 3,4,5</p> <p>Ürün belirlenen süre kadar çalışır. (2 Saat, 5 Saat, 8 Saat)</p>	
<p>BUTON 7,8</p> <p>4 modda dimlenebilir</p>	
<p>BUTON 6</p> <p>Sensör devre dışı kalır ve ürün gece boyunca sürekli çalışır.</p>	

60W LED SOLAR SOKAK ARMATÜR 9351

Kullanım Alanları

- Bahçeler
- Otoparklar
- Spor Alanları
- Sokaklar



Genel Özellikler

Gövde Materyali	: ABS Plastik
Ürün Rengi	: RAL 9005
Darbe Dayanımı	: IK06
IP Seviyesi	: IP65
Çalışma Sıcaklığı	: -25°C ~ +50°C
LED Ömrü	: 30.000 saat
Ürün Ömrü	: 30.000 saat
Sensör & Algılama Mesafesi	: Hareket Sensörü & 5-8m
Dim Özelliği	: Dim Edilebilir
Montaj Tipi	: Direğe Montaj

Solar Panel Özellikleri

Panel Tipi	: Polikristal
Panel Voltajı	: 6V
Panel Gücü	: 10W
Kontrol Ünitesi	: Uzaktan Kumanda


Elektriksel Özellikler

Güç	: 60 W
Pil Tipi	: LiFePo4
Pil Voltajı	: 3.2V
Pil Kapasitesi	: 10000mA
Şarj Süresi	: 6 - 7 saat
Çalışma Süresi	: 12 - 16 saat
Koruma Sınıfı	: III

EU 2019/2015 Enerji verimliliği direktifine göre güç ve ışık akısı değerleri için ±10% tolerans mevcuttur.



Optik Özellikler

Işık Akısı	: 1000 lm
Renksel Geriverim Endeksi CRI	: ≥ 80
Işık Açısı	: 120°
Işık Kaynağı	: Mid Power LED
Renk Sıcaklığı	: 6500K

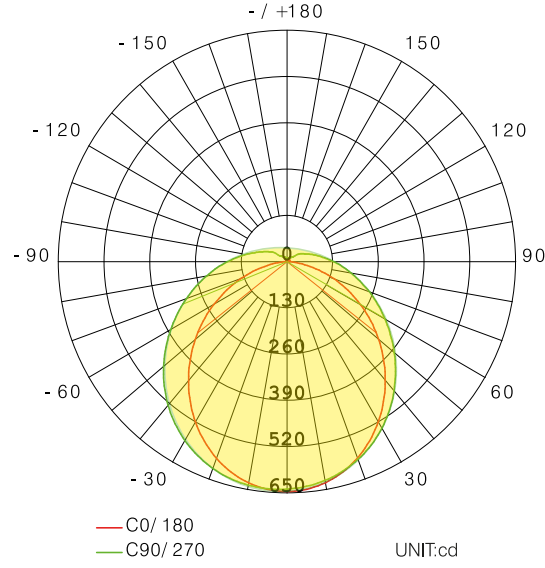

Işık Şiddeti Dağılım Eğrisi (Polar)

Boyutlar & Ağırlık









a	b	c	Ağırlık
190mm	480mm	55mm	1310g

Paketleme Verisi

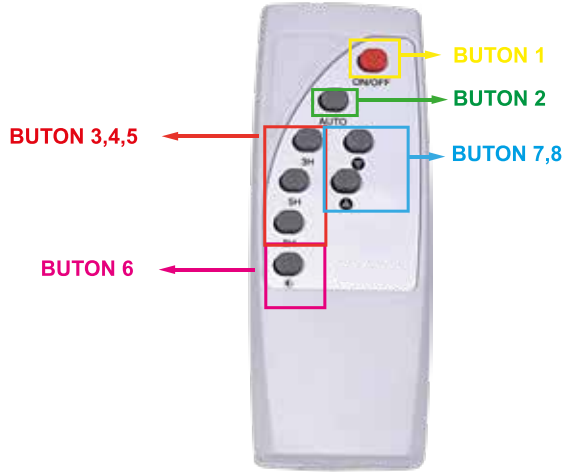Ürün Kodu	Kutu İçi Miktar (adet)	Koli İçi Miktar (adet)	Koli Boyutları (en x boy x yükseklik) (mm)	Koli Ağırlığı (kg)
9351	1	10	335 x 490 x 410	13,3

Uzaktan Kumanda Pin Diyagramı



<p>BUTON 1 AÇ/KAPAT</p>	
<p>BUTON 2 OTOMATİK MOD</p> <p>Bu modda sensör algıladığında ürün %100 ışık verir, sensör algılamadığında %30 ışık verir.</p>	
<p>BUTON 3,4,5</p> <p>Ürün belirlenen süre kadar çalışır. (2 Saat, 5 Saat, 8 Saat)</p>	
<p>BUTON 7,8</p> <p>4 modda dimlenebilir</p>	
<p>BUTON 6</p> <p>Sensör devre dışı kalır ve ürün gece boyunca sürekli çalışır.</p>	

90W LED SOLAR SOKAK ARMATÜR

9352

Kullanım Alanları

- Bahçeler
- Otoparklar
- Spor Alanları
- Sokaklar

Genel Özellikler

Gövde Materyali	: ABS Plastik
Ürün Rengi	: RAL 9005
Darbe Dayanımı	: IK06
IP Seviyesi	: IP65
Çalışma Sıcaklığı	: -25°C ~ +50°C
LED Ömrü	: 30.000 saat
Ürün Ömrü	: 30.000 saat
Sensör & Algılama Mesafesi	: Hareket Sensörü & 5-8m
Dim Özelliği	: Dim Edilebilir
Montaj Tipi	: Direğe Montaj



Solar Panel Özellikleri

Panel Tipi	: Polikristal
Panel Voltajı	: 6V
Panel Gücü	: 12W
Kontrol Ünitesi	: Uzaktan Kumanda


Elektriksel Özellikler

Güç	: 90 W
Pil Tipi	: LiFePo4
Pil Voltajı	: 3.2V
Pil Kapasitesi	: 12000mA
Şarj Süresi	: 6 - 7 saat
Çalışma Süresi	: 12 - 16 saat
Koruma Sınıfı	: III

EU 2019/2015 Enerji verimliliği direktifine göre güç ve ışık akısı değerleri için ±10% tolerans mevcuttur.



Optik Özellikler

Işık Akısı	: 1200 lm
Renksel Geriverim Endeksi CRI	: ≥ 80
Işık Açısı	: 120°
Işık Kaynağı	: Mid Power LED
Renk Sıcaklığı	: 6500K

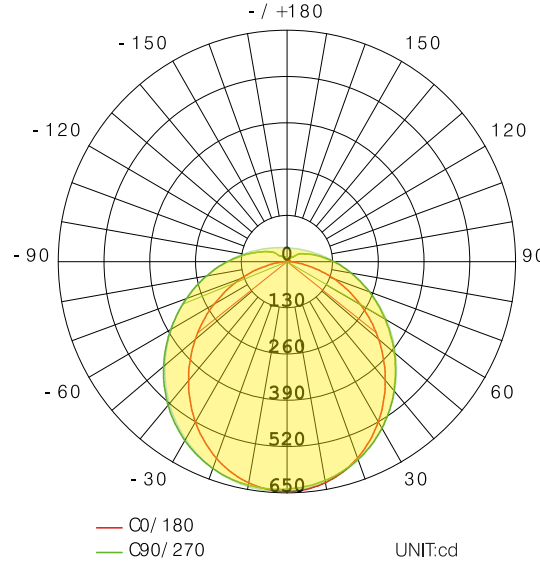

Işık Şiddeti Dağılım Eğrisi (Polar)

Boyutlar & Ağırlık









a	b	c	Ağırlık
190mm	480mm	55mm	1800g

Paketleme Verisi

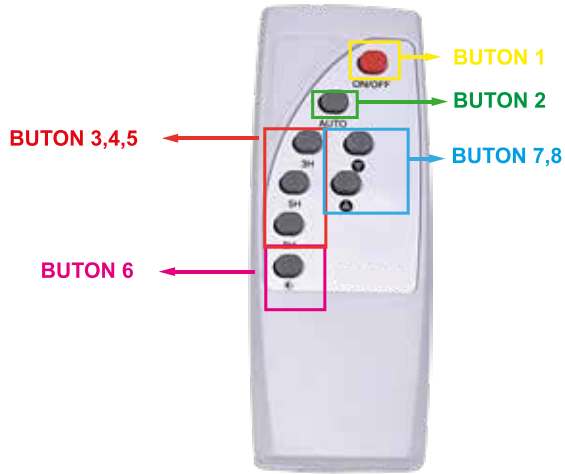Ürün Kodu	Kutu İçi Miktar (adet)	Koli İçi Miktar (adet)	Koli Boyutları (en x boy x yükseklik) (mm)	Koli Ağırlığı (kg)
9352	1	5	330 x 615 x 220	10,6

Uzaktan Kumanda Pin Diyagramı



<p>BUTON 1 AÇ/KAPAT</p>	
<p>BUTON 2 OTOMATİK MOD</p> <p>Bu modda sensör algıladığında ürün %100 ışık verir, sensör algılamadığında %30 ışık verir.</p>	
<p>BUTON 3,4,5</p> <p>Ürün belirlenen süre kadar çalışır. (2 Saat, 5 Saat, 8 Saat)</p>	
<p>BUTON 7,8</p> <p>4 modda dimlenebilir</p>	
<p>BUTON 6</p> <p>Sensör devre dışı kalır ve ürün gece boyunca sürekli çalışır.</p>	

120W LED SOLAR SOKAK ARMATÜR

9353

Kullanım Alanları

- Bahçeler
- Otoparklar
- Spor Alanları
- Sokaklar

Genel Özellikler

Gövde Materyali	: ABS Plastik
Ürün Rengi	: RAL 9005
Darbe Dayanımı	: IK06
IP Seviyesi	: IP65
Çalışma Sıcaklığı	: -25°C ~ +50°C
LED Ömrü	: 30.000 saat
Ürün Ömrü	: 30.000 saat
Sensör & Algılama Mesafesi	: Hareket Sensörü & 5-8m
Dim Özelliği	: Dim Edilebilir
Montaj Tipi	: Direğe Montaj



Solar Panel Özellikleri

Panel Tipi	: Polikristal
Panel Voltajı	: 6V
Panel Gücü	: 15W
Kontrol Ünitesi	: Uzaktan Kumanda


Elektriksel Özellikler

Güç	: 120 W
Pil Tipi	: LiFePo4
Pil Voltajı	: 3.2V
Pil Kapasitesi	: 15000mA
Şarj Süresi	: 6 - 7 saat
Çalışma Süresi	: 12 - 16 saat
Koruma Sınıfı	: III

EU 2019/2015 Enerji verimliliği direktifine göre güç ve ışık akısı değerleri için ±10% tolerans mevcuttur.



Optik Özellikler

Işık Akısı	: 1500 lm
Renksel Geriverim Endeksi CRI	: ≥ 80
Işık Açısı	: 120°
Işık Kaynağı	: Mid Power LED
Renk Sıcaklığı	: 6500K

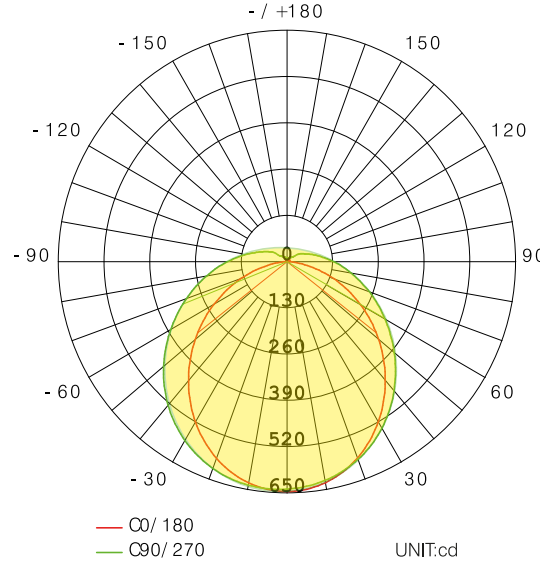

Işık Şiddeti Dağılım Eğrisi (Polar)

Boyutlar & Ağırlık









a	b	c	Ağırlık
250mm	630mm	55mm	2500g

Paketleme Verisi

Ürün Kodu	Kutu İçi Miktar (adet)	Koli İçi Miktar (adet)	Koli Boyutları (en x boy x yükseklik) (mm)	Koli Ağırlığı (kg)
9353	1	5	360 x 640 x 275	14,2

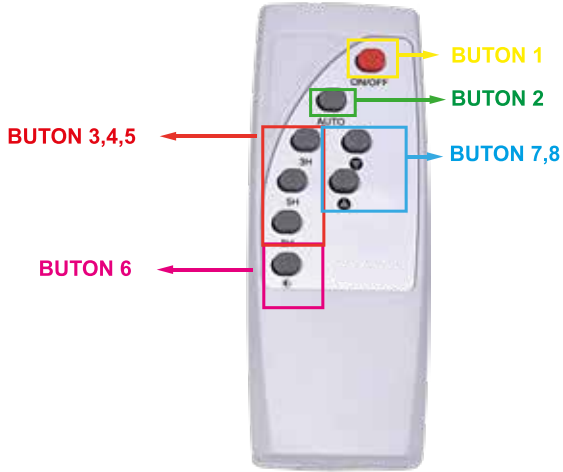Uzaktan Kumanda Pin Diyagramı



<p>BUTON 1 AÇ/KAPAT</p>	
<p>BUTON 2 OTOMATİK MOD</p> <p>Bu modda sensör algıladığında ürün %100 ışık verir, sensör algılamadığında %30 ışık verir.</p>	
<p>BUTON 3,4,5</p> <p>Ürün belirlenen süre kadar çalışır. (2 Saat, 5 Saat, 8 Saat)</p>	
<p>BUTON 7,8</p> <p>4 modda dimlenebilir</p>	
<p>BUTON 6</p> <p>Sensör devre dışı kalır ve ürün gece boyunca sürekli çalışır.</p>	

200W LED SOLAR SOKAK ARMATÜR

9361

Kullanım Alanları

- Bahçeler
- Otoparklar
- Spor Alanları
- Sokaklar

Genel Özellikler

Gövde Materyali	: ABS Plastik
Ürün Rengi	: RAL 9005
Darbe Dayanımı	: IK06
IP Seviyesi	: IP65
Çalışma Sıcaklığı	: -25°C ~ +50°C
LED Ömrü	: 30.000 saat
Ürün Ömrü	: 30.000 saat
Sensör & Algılama Mesafesi	: Hareket Sensörü & 5-8m
Dim Özelliği	: Dim Edilebilir
Montaj Tipi	: Direğe Montaj

Solar Panel Özellikleri

Panel Tipi	: Polikristal
Panel Voltajı	: 5V
Panel Gücü	: 14W
Kontrol Ünitesi	: Uzaktan Kumanda


Elektriksel Özellikler

Güç	: 200 W
Pil Tipi	: LiFePo4
Pil Voltajı	: 3.2V
Pil Kapasitesi	: 15000mA
Şarj Süresi	: 6 - 7 saat
Çalışma Süresi	: 12 - 16 saat
Koruma Sınıfı	: III





Optik Özellikler

Işık Akısı	: 1800 lm
Renksel Geriverim Endeksi CRI	: ≥ 80
Işık Açısı	: 120°
Işık Kaynağı	: Mid Power LED
Renk Sıcaklığı	: 6500K

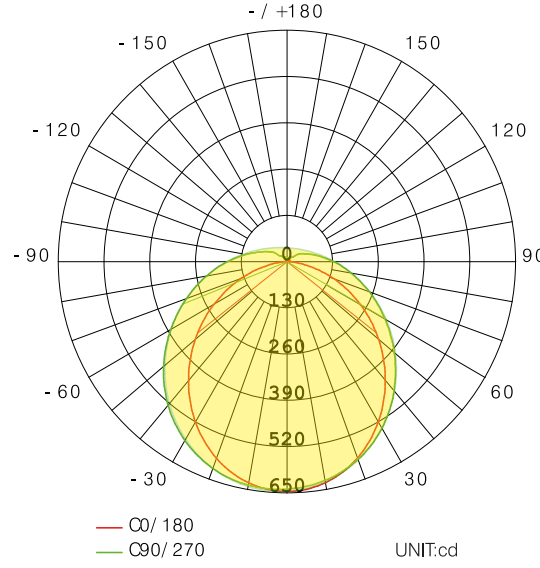

Işık Şiddeti Dağılım Eğrisi (Polar)

Boyutlar & Ağırlık









a	b	c	Ağırlık
220mm	650mm	70mm	2500g

Paketleme Verisi

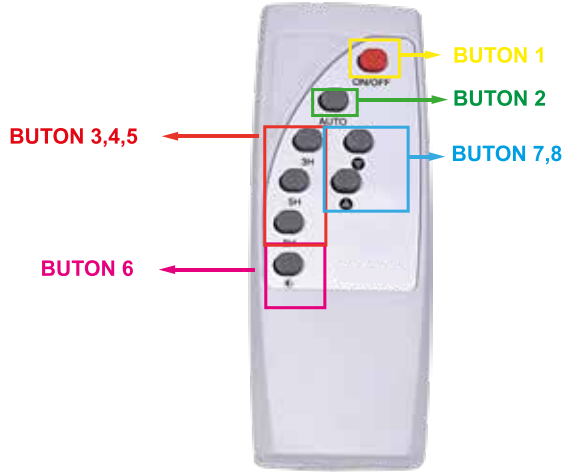Ürün Kodu	Kutu İçi Miktar (adet)	Koli İçi Miktar (adet)	Koli Boyutları (en x boy x yükseklik) (mm)	Koli Ağırlığı (kg)
9361	1	5	250 x 670 x 300	21.56

Uzaktan Kumanda Pin Diyagramı



<p>BUTON 1 AÇ/KAPAT</p>	
<p>BUTON 2 OTOMATİK MOD</p> <p>Bu modda sensör algıladığında ürün %100 ışık verir, sensör algılamadığında %30 ışık verir.</p>	
<p>BUTON 3,4,5</p> <p>Ürün belirlenen süre kadar çalışır. (2 Saat, 5 Saat, 8 Saat)</p>	
<p>BUTON 7,8</p> <p>4 modda dimlenebilir</p>	
<p>BUTON 6</p> <p>Sensör devre dışı kalır ve ürün gece boyunca sürekli çalışır.</p>	

300W LED SOLAR SOKAK ARMATÜR

9363

Kullanım Alanları

- Bahçeler
- Otoparklar
- Spor Alanları
- Sokaklar



Genel Özellikler

Gövde Materyali	: ABS Plastik
Ürün Rengi	: RAL 9005
Darbe Dayanımı	: IK06
IP Seviyesi	: IP65
Çalışma Sıcaklığı	: -25°C ~ +50°C
LED Ömrü	: 30.000 saat
Ürün Ömrü	: 30.000 saat
Sensör & Algılama Mesafesi	: Hareket Sensörü & 5-8m
Dim Özelliği	: Dim Edilebilir
Montaj Tipi	: Direğe Montaj

Solar Panel Özellikleri

Panel Tipi	: Polikristal
Panel Voltajı	: 5V
Panel Gücü	: 20W
Kontrol Ünitesi	: Uzaktan Kumanda


Elektriksel Özellikler

Güç	: 300 W
Pil Tipi	: LiFePo4
Pil Voltajı	: 3.2V
Pil Kapasitesi	: 20000mA
Şarj Süresi	: 6 - 7 saat
Çalışma Süresi	: 12 - 16 saat
Koruma Sınıfı	: III

EU 2019/2015 Enerji verimliliği direktifine göre güç ve ışık akısı değerleri için ±10% tolerans mevcuttur.



Optik Özellikler

Işık Akısı	: 2700 lm
Renksel Geriverim Endeksi CRI	: ≥ 80
Işık Açısı	: 120°
Işık Kaynağı	: Mid Power LED
Renk Sıcaklığı	: 6500K

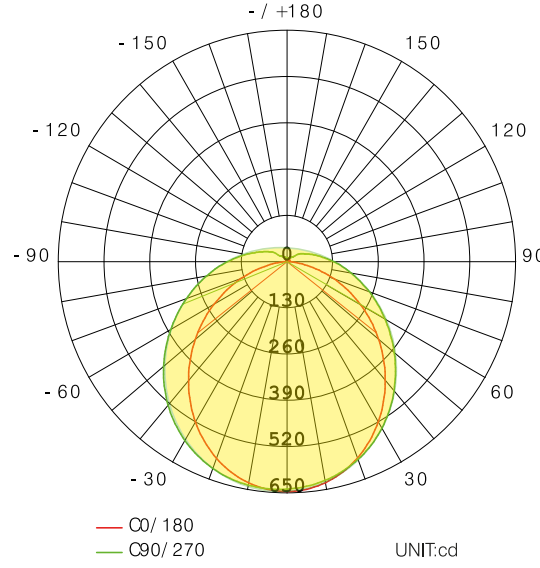

Işık Şiddeti Dağılım Eğrisi (Polar)

Boyutlar & Ağırlık

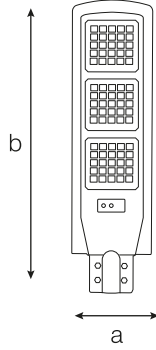


a	b	c	Ağırlık
240mm	805mm	70mm	2940g

Paketleme Verisi

Ürün Kodu	Kutu İçi Miktar (adet)	Koli İçi Miktar (adet)	Koli Boyutları (en x boy x yükseklik) (mm)	Koli Ağırlığı (kg)
9363	1	4	200 x 835 x 300	28.6

Uzaktan Kumanda Pin Diyagramı

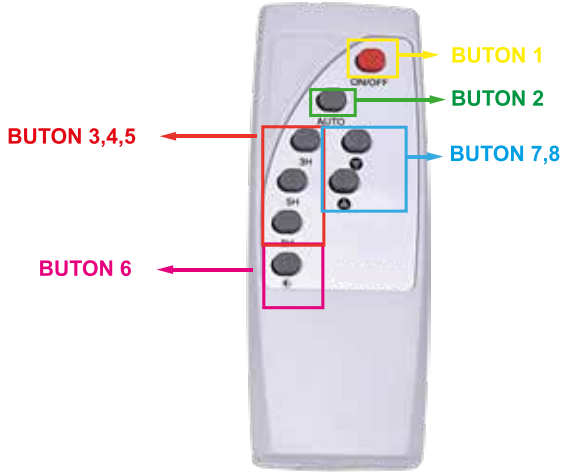

<p>BUTON 1 AÇ/KAPAT</p>	
<p>BUTON 2 OTOMATİK MOD</p> <p>Bu modda sensör algıladığında ürün %100 ışık verir, sensör algılamadığında %30 ışık verir.</p>	
<p>BUTON 3,4,5</p> <p>Ürün belirlenen süre kadar çalışır. (2 Saat, 5 Saat, 8 Saat)</p>	
<p>BUTON 7,8</p> <p>4 modda dimlenebilir</p>	
<p>BUTON 6</p> <p>Sensör devre dışı kalır ve ürün gece boyunca sürekli çalışır.</p>	

180W LED SOLAR PARK ARMATÜR

9371

Kullanım Alanları

- Bahçeler
- Otoparklar
- Spor Alanları
- Sokaklar



Genel Özellikler

Gövde Materyali	: ABS Plastik
Ürün Rengi	: RAL 9005
Darbe Dayanımı	: IK06
IP Seviyesi	: IP65
Çalışma Sıcaklığı	: -25°C ~ +50°C
LED Ömrü	: 30.000 saat
Ürün Ömrü	: 30.000 saat
Sensör & Algılama Mesafesi	: Hareket Sensörü & 5-8m
Dim Özelliği	: Dim Edilebilir
Montaj Tipi	: Direğe Montaj

Solar Panel Özellikleri


Panel Tipi	: Polikristal
Panel Voltajı	: 5V
Panel Gücü	: 15W
Kontrol Ünitesi	: Uzaktan Kumanda

Elektriksel Özellikler

Güç	: 180 W
Pil Tipi	: LiFePo4
Pil Voltajı	: 3.2V
Pil Kapasitesi	: 15000mA
Şarj Süresi	: 4 - 6 saat
Çalışma Süresi	: 10 - 12 saat
Koruma Sınıfı	: III


Optik Özellikler

Işık Akısı	: 1040 lm
Renksel Geriverim Endeksi CRI	: ≥ 80
Işık Açısı	: 120°
Işık Kaynağı	: Mid Power LED
Renk Sıcaklığı	: 6500K

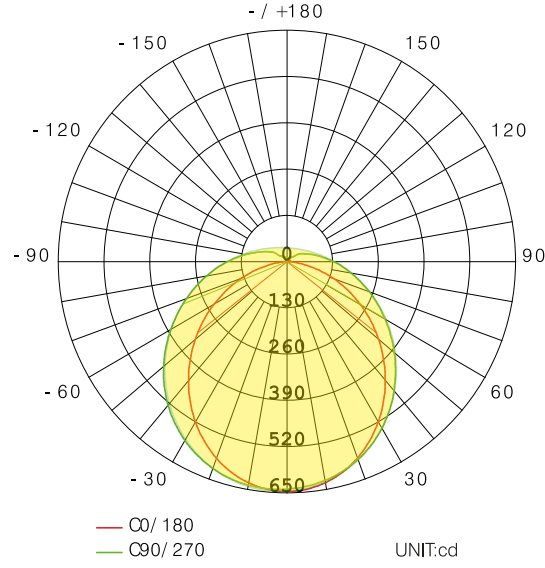

Işık Şiddeti Dağılım Eğrisi (Polar)

Boyutlar & Ağırlık

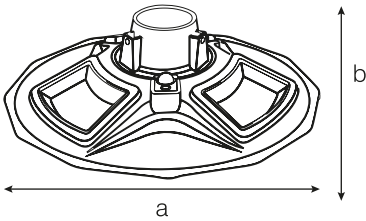


a	b	Ağırlık
420mm	120mm	2135g

Paketleme Verisi

Ürün Kodu	Kutu İçi Miktar (adet)	Koli İçi Miktar (adet)	Koli Boyutları (en x boy x yükseklik) (mm)	Koli Ağırlığı (kg)
9371	1	5	200 x 545 x 170	18.1

Uzaktan Kumanda Pin Diyagramı

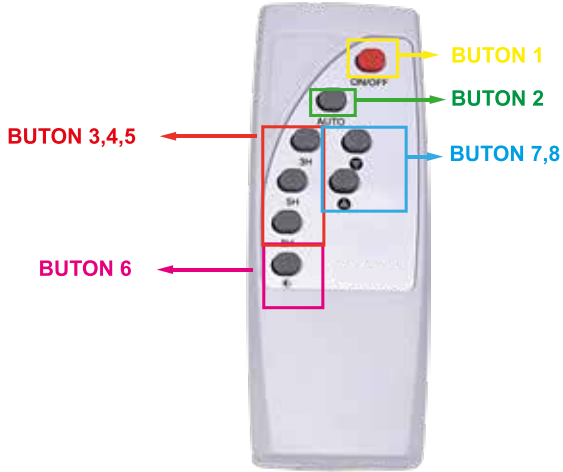

<p>BUTON 1 AÇ/KAPAT</p>	
<p>BUTON 2 OTOMATİK MOD</p> <p>Bu modda sensör algıladığında ürün %100 ışık verir, sensör algılamadığında %30 ışık verir.</p>	
<p>BUTON 3,4,5</p> <p>Ürün belirlenen süre kadar çalışır. (2 Saat, 5 Saat, 8 Saat)</p>	
<p>BUTON 7,8</p> <p>4 modda dimlenebilir</p>	
<p>BUTON 6</p> <p>Sensör devre dışı kalır ve ürün gece boyunca sürekli çalışır.</p>	

300W LED SOLAR PARK ARMATÜR

9372

Kullanım Alanları

- Bahçeler
- Otoparklar
- Spor Alanları
- Sokaklar



Genel Özellikler

Gövde Materyali	: ABS Plastik
Ürün Rengi	: RAL 9005
Darbe Dayanımı	: IK06
IP Seviyesi	: IP65
Çalışma Sıcaklığı	: -25°C ~ +50°C
LED Ömrü	: 30.000 saat
Ürün Ömrü	: 30.000 saat
Sensör & Algılama Mesafesi	: Hareket Sensörü & 5-8m
Dim Özelliği	: Dim Edilebilir
Montaj Tipi	: Direğe Montaj

Solar Panel Özellikleri


Panel Tipi	: Polikristal
Panel Voltajı	: 5V
Panel Gücü	: 20W
Kontrol Ünitesi	: Uzaktan Kumanda

Elektriksel Özellikler

Güç	: 300 W
Pil Tipi	: LiFePo4
Pil Voltajı	: 3.2V
Pil Kapasitesi	: 20000mA
Şarj Süresi	: 4 - 6 saat
Çalışma Süresi	: 10 - 12 saat
Koruma Sınıfı	: III


Optik Özellikler

Işık Akısı	: 1250 lm
Renksel Geriverim Endeksi CRI	: ≥ 80
Işık Açısı	: 120°
Işık Kaynağı	: Mid Power LED
Renk Sıcaklığı	: 6500K

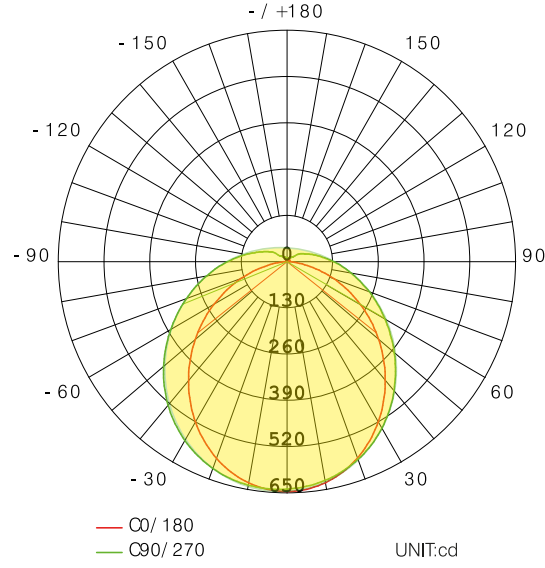

Işık Şiddeti Dağılım Eğrisi (Polar)

Boyutlar & Ağırlık

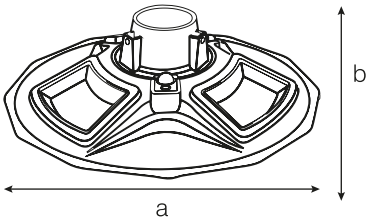







a	b	Ağırlık
550mm	120mm	2450g

Paketleme Verisi

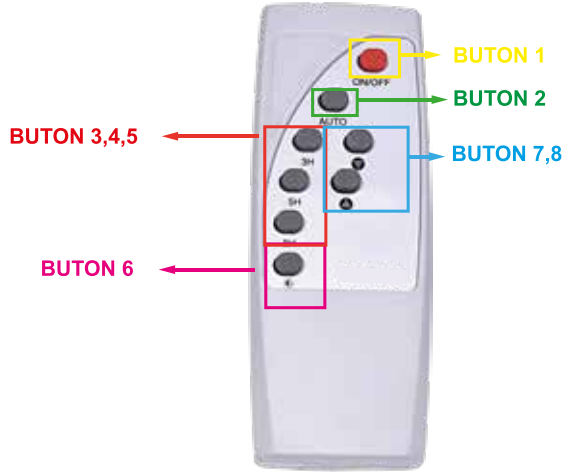Ürün Kodu	Kutu İçi Miktar (adet)	Koli İçi Miktar (adet)	Koli Boyutları (en x boy x yükseklik) (mm)	Koli Ağırlığı (kg)
9372	1	5	200 x 660 x 170	22.45

Uzaktan Kumanda Pin Diyagramı



<p>BUTON 1 AÇ/KAPAT</p>	
<p>BUTON 2 OTOMATİK MOD</p> <p>Bu modda sensör algıladığında ürün %100 ışık verir, sensör algılamadığında %30 ışık verir.</p>	
<p>BUTON 3,4,5</p> <p>Ürün belirlenen süre kadar çalışır. (2 Saat, 5 Saat, 8 Saat)</p>	
<p>BUTON 7,8</p> <p>4 modda dimlenebilir</p>	
<p>BUTON 6</p> <p>Sensör devre dışı kalır ve ürün gece boyunca sürekli çalışır.</p>	

30W LED SOLAR STREET LUMINAIRE

9350

Areas of Usage

- Garden
- Car Parks
- Sports Areas
- Streets



General Features

Housing Material	: ABS Plastic
Product Color	: RAL 9005
Impact Resistance	: IK06
IP Rating	: IP65
Operating Temperature	: -25°C ~ +50°C
LED Lifespan	: 30.000 h
Product Lifespan	: 30.000 h
Sensor & Sensing Distance	: Motion Sensor 360° & 5-8m
Dimmability	: Dimmable
Mounting Type	: Pole Mounted

Solar Panel Features

Panel Type	: Polycrystalline
Panel Voltage	: 6V
Panel Power	: 8W
Control Unit	: Remote Control


Electrical Features

Power	: 30 W
Battery Type	: LiFePo4
Battery Voltage	: 3.2V
Battery Capacity	: 6000mA
Charging Time	: 6 - 7 h
Operating Time	: 12 - 16 h
Protection Class	: III


According to EU 2019/2015 Energy efficiency directive, there is a tolerance of ±10% for power and luminous flux values.

Optical Features

Luminous Flux	: 600 lm
Color Rendering Index CRI	: ≥ 80
Beam Angle	: 120°
Light Source	: Mid Power LED
Color Temperature	: 6500K

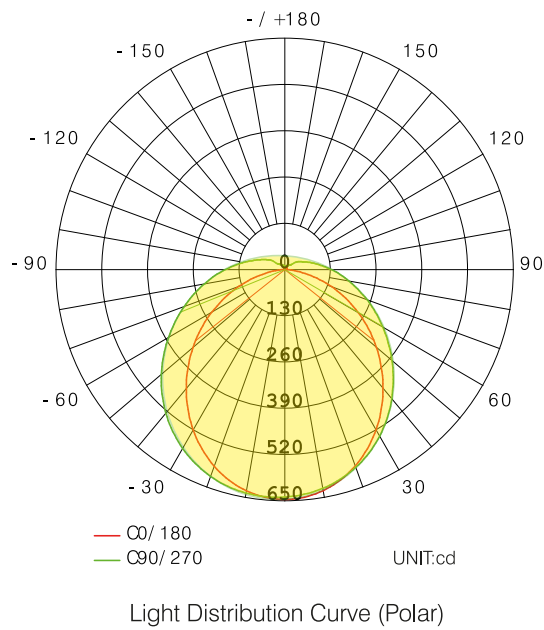


Dimensions & Weight

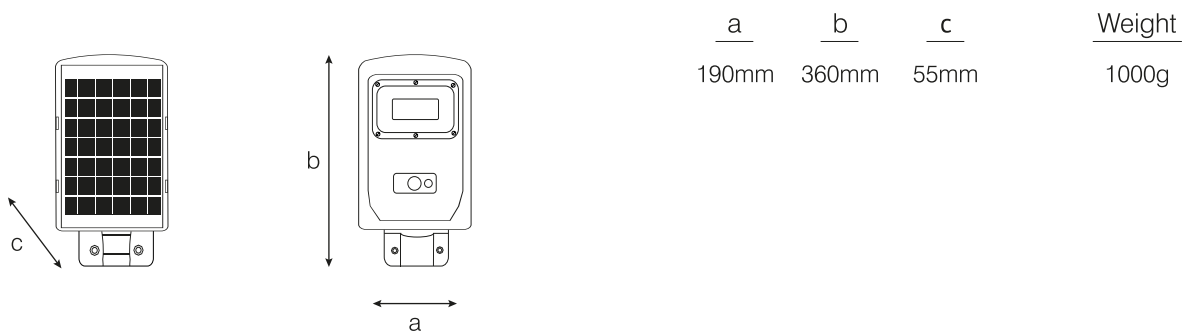

Packaging Data

Product Code	Units per Box (pcs)	Units per Carton (pcs)	Dimensions (width x length x height) (mm)	Weight (kg)
9350	1	10	335 x 400 x 380	10,2

Remote Control Pin Diagram

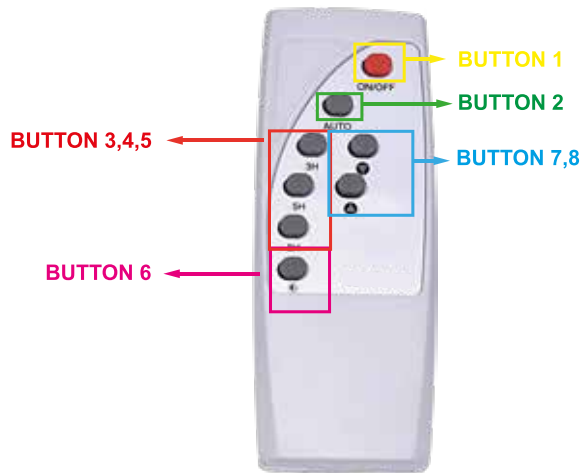

<p>BUTTON 1 ON/OFF</p>	
<p>BUTTON 2 AUTO MOD</p> <p>In this mode, when the sensor detects, the product works with 100% light. When the sensor is not detects, the product works with %30 light.</p>	
<p>BUTTON 3,4,5</p> <p>The product stays on during the specified time intervals. (2 Hour, 5 Hour, 8 Hour)</p>	
<p>BUTTON 7.8</p> <p>It is dimmed in 4 steps.</p>	
<p>BUTTON 6</p> <p>Sensor disabled mode, Sensor is deactivating, The product starts working when at night.</p>	

60W LED SOLAR STREET LUMINAIRE

9351

Areas of Usage

- Garden
- Car Parks
- Sports Areas
- Streets



General Features

Housing Material	: ABS Plastic
Product Color	: RAL 9005
Impact Resistance	: IK06
IP Rating	: IP65
Operating Temperature	: -25°C ~ +50°C
LED Lifespan	: 30.000 h
Product Lifespan	: 30.000 h
Sensor & Sensing Distance	: Motion Sensor 360° & 5-8m
Dimmability	: Dimmable
Mounting Type	: Pole Mounted

Solar Panel Features

Panel Type	: Polycrystalline
Panel Voltage	: 6V
Panel Power	: 10W
Control Unit	: Remote Control


Electrical Features

Power	: 60 W
Battery Type	: LiFePo4
Battery Voltage	: 3.2V
Battery Capacity	: 10000mA
Charging Time	: 6 - 7 h
Operating Time	: 12 - 16 h
Protection Class	: III



According to EU 2019/2015 Energy efficiency directive, there is a tolerance of ±10% for power and luminous flux values.

Optical Features

Luminous Flux	: 1000 lm
Color Rendering Index CRI	: ≥ 80
Beam Angle	: 120°
Light Source	: Mid Power LED
Color Temperature	: 6500K

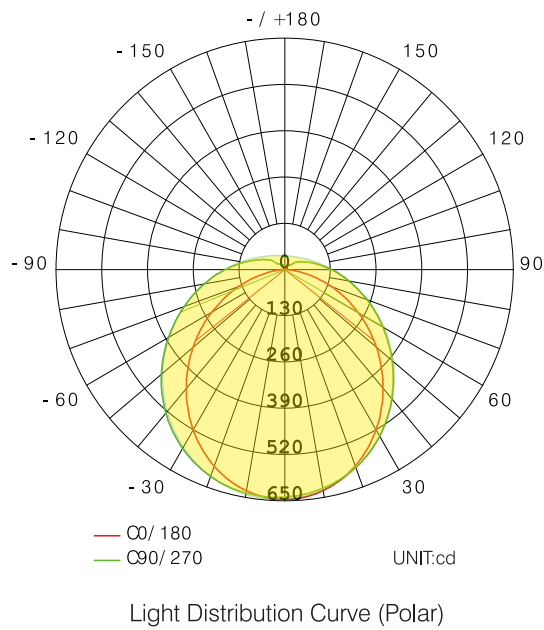

Dimensions & Weight




<u>a</u>	<u>b</u>	<u>c</u>	<u>Weight</u>
190mm	480mm	55mm	1310g

Packaging Data

<u>Product Code</u>	<u>Units per Box (pcs)</u>	<u>Units per Carton (pcs)</u>	<u>Dimensions (width x length x height) (mm)</u>	<u>Weight (kg)</u>
9351	1	10	335 x 490 x 410	13,3

Remote Control Pin Diagram

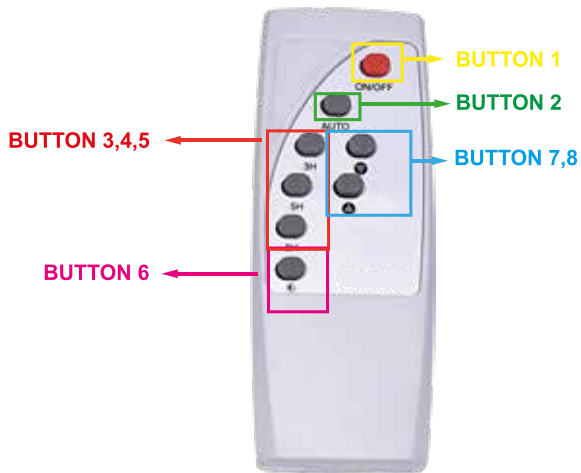

<p>BUTTON 1 ON/OFF</p>	
<p>BUTTON 2 AUTO MOD</p> <p>In this mode, when the sensor detects, the product works with 100% light. When the sensor is not detects, the product works with %30 light.</p>	
<p>BUTTON 3,4,5</p> <p>The product stays on during the specified time intervals. (2 Hour, 5 Hour, 8 Hour)</p>	
<p>BUTTON 7,8</p> <p>It is dimmed in 4 steps.</p>	
<p>BUTTON 6</p> <p>Sensor disabled mode, Sensor is deactivating, The product starts working when at night.</p>	

90W LED SOLAR STREET LUMINAIRE

9352

Areas of Usage

- Garden
- Car Parks
- Sports Areas
- Streets



General Features

Housing Material	: ABS Plastic
Product Color	: RAL 9005
Impact Resistance	: IK06
IP Rating	: IP65
Operating Temperature	: -25°C ~ +50°C
LED Lifespan	: 30.000 h
Product Lifespan	: 30.000 h
Sensor & Sensing Distance	: Motion Sensor 360° & 5-8m
Dimmability	: Dimmable
Mounting Type	: Pole Mounted

Solar Panel Features

Panel Type	: Polycrystalline
Panel Voltage	: 6V
Panel Power	: 12W
Control Unit	: Remote Control


Electrical Features

Power	: 90 W
Battery Type	: LiFePo4
Battery Voltage	: 3.2V
Battery Capacity	: 12000mA
Charging Time	: 6 - 7 h
Operating Time	: 12 - 16 h
Protection Class	: III



According to EU 2019/2015 Energy efficiency directive, there is a tolerance of ±10% for power and luminous flux values.

Optical Features

Luminous Flux	: 1200 lm
Color Rendering Index CRI	: ≥ 80
Beam Angle	: 120°
Light Source	: Mid Power LED
Color Temperature	: 6500K

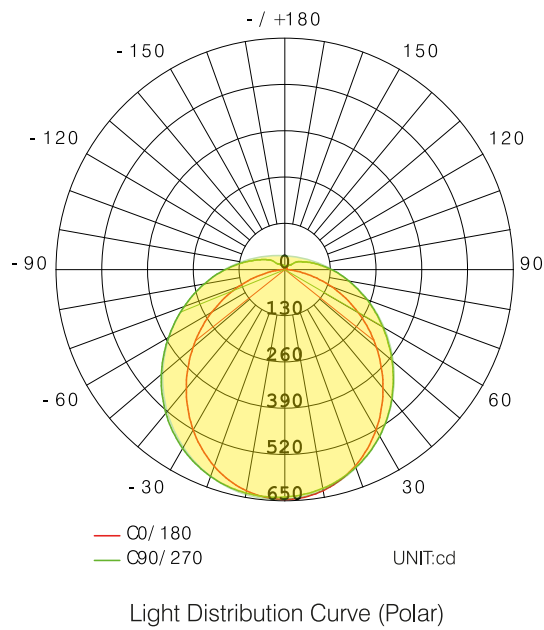

Dimensions & Weight




<u>a</u>	<u>b</u>	<u>c</u>	<u>Weight</u>
190mm	480mm	55mm	1800g

Packaging Data

<u>Product Code</u>	<u>Units per Box (pcs)</u>	<u>Units per Carton (pcs)</u>	<u>Dimensions (width x length x height) (mm)</u>	<u>Weight (kg)</u>
9352	1	5	330 x 615 x 220	10,6

Remote Control Pin Diagram

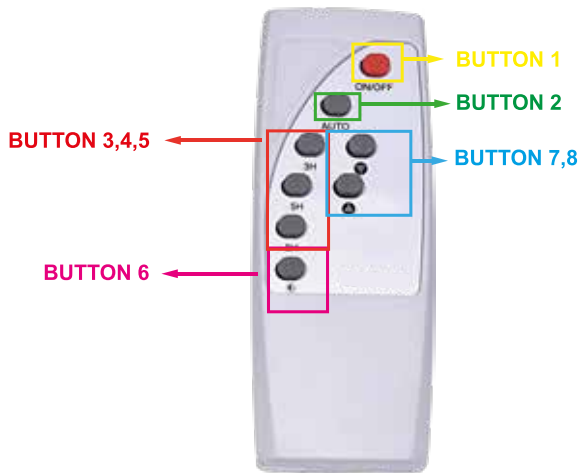

<p>BUTTON 1 ON/OFF</p>	
<p>BUTTON 2 AUTO MOD</p> <p>In this mode, when the sensor detects, the product works with 100% light. When the sensor is not detects, the product works with %30 light.</p>	
<p>BUTTON 3,4,5</p> <p>The product stays on during the specified time intervals. (2 Hour, 5 Hour, 8 Hour)</p>	
<p>BUTTON 7.8</p> <p>It is dimmed in 4 steps.</p>	
<p>BUTTON 6</p> <p>Sensor disabled mode, Sensor is deactivating, The product starts working when at night.</p>	

120W LED SOLAR STREET LUMINAIRE

9353



Areas of Usage

- Garden
- Car Parks
- Sports Areas
- Streets

General Features

Housing Material	: ABS Plastic
Product Color	: RAL 9005
Impact Resistance	: IK06
IP Rating	: IP65
Operating Temperature	: -25°C ~ +50°C
LED Lifespan	: 30.000 h
Product Lifespan	: 30.000 h
Sensor & Sensing Distance	: Motion Sensor 360° & 5-8m
Dimmability	: Dimmable
Mounting Type	: Pole Mounted

Solar Panel Features

Panel Type	: Polycrystalline
Panel Voltage	: 6V
Panel Power	: 15W
Control Unit	: Remote Control


Electrical Features

Power	: 120 W
Battery Type	: LiFePo4
Battery Voltage	: 3.2V
Battery Capacity	: 15000mA
Charging Time	: 6 - 7 h
Operating Time	: 12 - 16 h
Protection Class	: III



According to EU 2019/2015 Energy efficiency directive, there is a tolerance of ±10% for power and luminous flux values.

Optical Features

Luminous Flux	: 1500 lm
Color Rendering Index CRI	: ≥ 80
Beam Angle	: 120°
Light Source	: Mid Power LED
Color Temperature	: 6500K

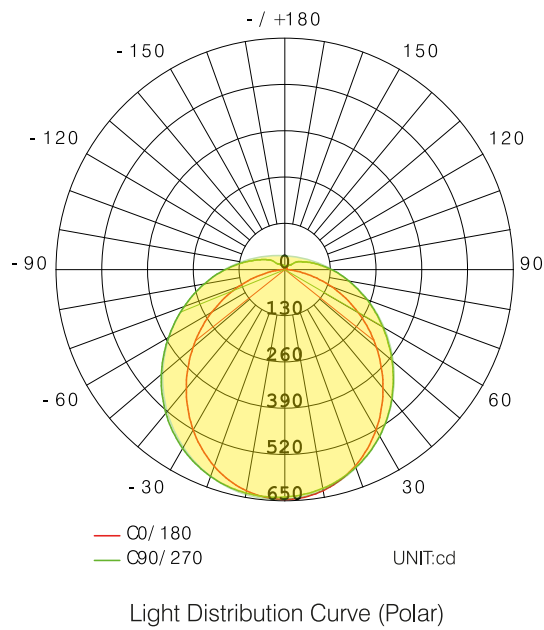

Dimensions & Weight




<u>a</u>	<u>b</u>	<u>c</u>
250mm	630mm	55mm

<u>Weight</u>
2500g

Packaging Data

Product Code	Units per Box (pcs)	Units per Carton (pcs)	Dimensions (width x length x height) (mm)	Weight (kg)
9353	1	5	360 x 640 x 275	14,2

Remote Control Pin Diagram

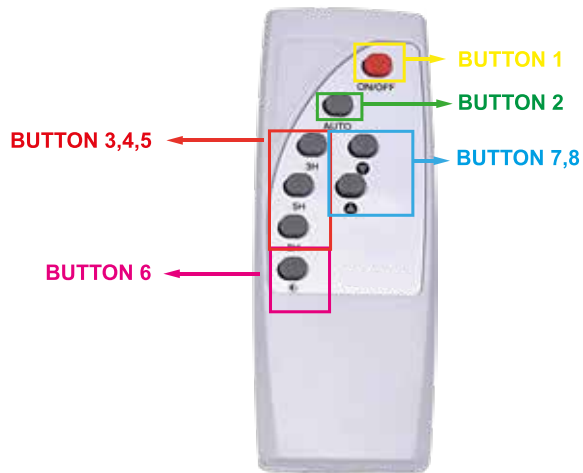

<p>BUTTON 1 ON/OFF</p>	
<p>BUTTON 2 AUTO MOD</p> <p>In this mode, when the sensor detects, the product works with 100% light. When the sensor is not detects, the product works with %30 light.</p>	
<p>BUTTON 3,4,5</p> <p>The product stays on during the specified time intervals. (2 Hour, 5 Hour, 8 Hour)</p>	
<p>BUTTON 7,8</p> <p>It is dimmed in 4 steps.</p>	
<p>BUTTON 6</p> <p>Sensor disabled mode, Sensor is deactivating, The product starts working when at night.</p>	

200W LED SOLAR STREET LUMINAIRE

9361



Areas of Usage

- Garden
- Car Parks
- Sports Areas
- Streets

General Features

Housing Material	: ABS Plastic
Product Color	: RAL 9005
Impact Resistance	: IK06
IP Rating	: IP65
Operating Temperature	: -25°C ~ +50°C
LED Lifespan	: 30.000 h
Product Lifespan	: 30.000 h
Sensor & Sensing Distance	: Motion Sensor 360° & 5-8m
Dimmability	: Dimmable
Mounting Type	: Pole Mounted

Solar Panel Features

Panel Type	: Polycrystalline
Panel Voltage	: 5V
Panel Power	: 14W
Control Unit	: Remote Control


Electrical Features

Power	: 200 W
Battery Type	: LiFePo4
Battery Voltage	: 3.2V
Battery Capacity	: 15000mA
Charging Time	: 6 - 7 h
Operating Time	: 12 - 16 h
Protection Class	: III



According to EU 2019/2015 Energy efficiency directive, there is a tolerance of ±10% for power and luminous flux values.

Optical Features

Luminous Flux : 1800 lm
 Color Rendering Index CRI : ≥ 80
 Beam Angle : 120°
 Light Source : Mid Power LED
 Color Temperature : 6500K

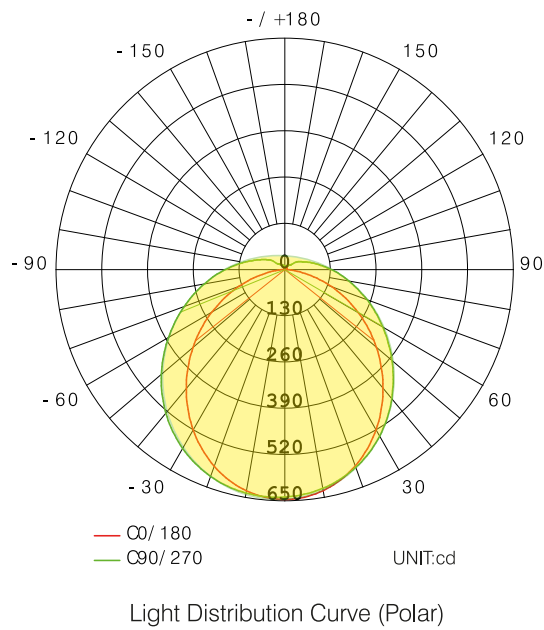

Dimensions & Weight




a b c
 220mm 650mm 70mm

Weight
 2500g

Packaging Data

Product Code	Units per Box (pcs)	Units per Carton (pcs)	Dimensions (width x length x height) (mm)	Weight (kg)
9361	1	5	250 x 670 x 300	21,56

Remote Control Pin Diagram

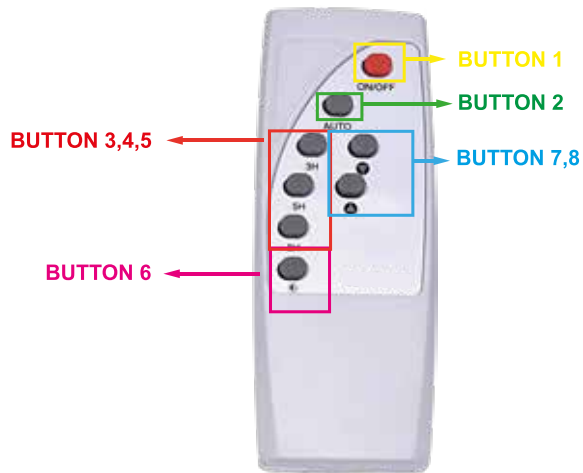

<p>BUTTON 1 ON/OFF</p>	
<p>BUTTON 2 AUTO MOD</p> <p>In this mode, when the sensor detects, the product works with 100% light. When the sensor is not detects, the product works with %30 light.</p>	
<p>BUTTON 3,4,5</p> <p>The product stays on during the specified time intervals. (2 Hour, 5 Hour, 8 Hour)</p>	
<p>BUTTON 7.8</p> <p>It is dimmed in 4 steps.</p>	
<p>BUTTON 6</p> <p>Sensor disabled mode, Sensor is deactivating, The product starts working when at night.</p>	

300W LED SOLAR STREET LUMINAIRE

9363



Areas of Usage

- Garden
- Car Parks
- Sports Areas
- Streets

General Features

Housing Material	: ABS Plastic
Product Color	: RAL 9005
Impact Resistance	: IK06
IP Rating	: IP65
Operating Temperature	: -25°C ~ +50°C
LED Lifespan	: 30.000 h
Product Lifespan	: 30.000 h
Sensor & Sensing Distance	: Motion Sensor 360° & 5-8m
Dimmability	: Dimmable
Mounting Type	: Pole Mounted

Solar Panel Features

Panel Type	: Polycrystalline
Panel Voltage	: 5V
Panel Power	: 20W
Control Unit	: Remote Control


Electrical Features

Power	: 300 W
Battery Type	: LiFePo4
Battery Voltage	: 3.2V
Battery Capacity	: 20000mA
Charging Time	: 6 - 7 h
Operating Time	: 12 - 16 h
Protection Class	: III



According to EU 2019/2015 Energy efficiency directive, there is a tolerance of ±10% for power and luminous flux values.

Optical Features

Luminous Flux	: 2700 lm
Color Rendering Index CRI	: ≥ 80
Beam Angle	: 120°
Light Source	: Mid Power LED
Color Temperature	: 6500K

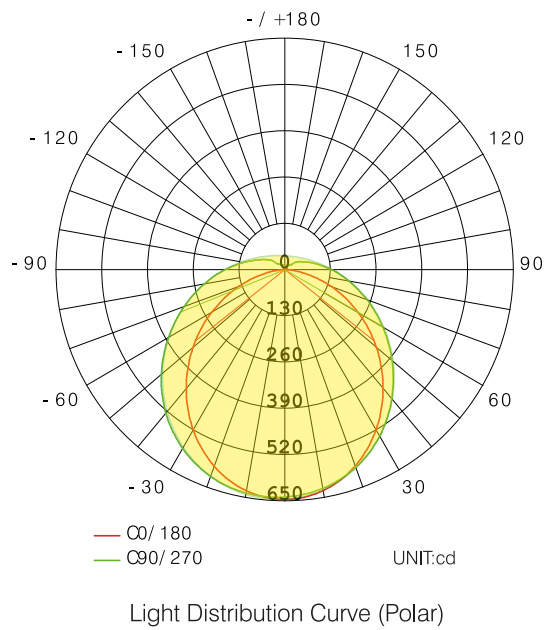

Dimensions & Weight

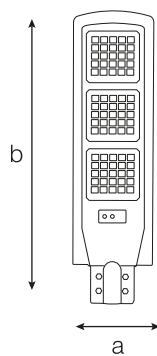


<u>a</u>	<u>b</u>	<u>c</u>	<u>Weight</u>
240mm	805mm	70mm	2940g

Packaging Data

<u>Product Code</u>	<u>Units per Box (pcs)</u>	<u>Units per Carton (pcs)</u>	<u>Dimensions (width x length x height) (mm)</u>	<u>Weight (kg)</u>
9363	1	4	200 x 835 x 300	28,6

Remote Control Pin Diagram

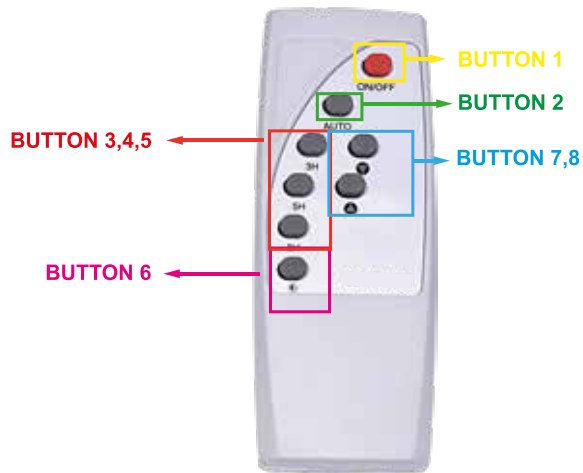

<p>BUTTON 1 ON/OFF</p>	
<p>BUTTON 2 AUTO MOD</p> <p>In this mode, when the sensor detects, the product works with 100% light. When the sensor is not detects, the product works with %30 light.</p>	
<p>BUTTON 3,4,5</p> <p>The product stays on during the specified time intervals. (2 Hour, 5 Hour, 8 Hour)</p>	
<p>BUTTON 7.8</p> <p>It is dimmed in 4 steps.</p>	
<p>BUTTON 6</p> <p>Sensor disabled mode, Sensor is deactivating, The product starts working when at night.</p>	

180W LED SOLAR PARK LUMINAIRE

9371

Areas of Usage

- Garden
- Car Parks
- Sports Areas
- Streets



General Features

Housing Material	: ABS Plastic
Product Color	: RAL 9005
Impact Resistance	: IK06
IP Rating	: IP65
Operating Temperature	: -25°C ~ +50°C
LED Lifespan	: 30.000 h
Product Lifespan	: 30.000 h
Sensor & Sensing Distance	: Motion Sensor 360° & 5-8m
Dimmability	: Dimmable
Mounting Type	: Pole Mounted

Solar Panel Features

Panel Type	: Polycrystalline
Panel Voltage	: 5V
Panel Power	: 15W
Control Unit	: Remote Control


Electrical Features

Power	: 300 W
Battery Type	: LiFePo4
Battery Voltage	: 3.2V
Battery Capacity	: 15000mA
Charging Time	: 6 - 7 h
Operating Time	: 12 - 16 h
Protection Class	: III


According to EU 2019/2015 Energy efficiency directive, there is a tolerance of ±10% for power and luminous flux values.

Optical Features

Luminous Flux : 1040 lm
 Color Rendering Index CRI : ≥ 80
 Beam Angle : 120°
 Light Source : Mid Power LED
 Color Temperature : 6500K

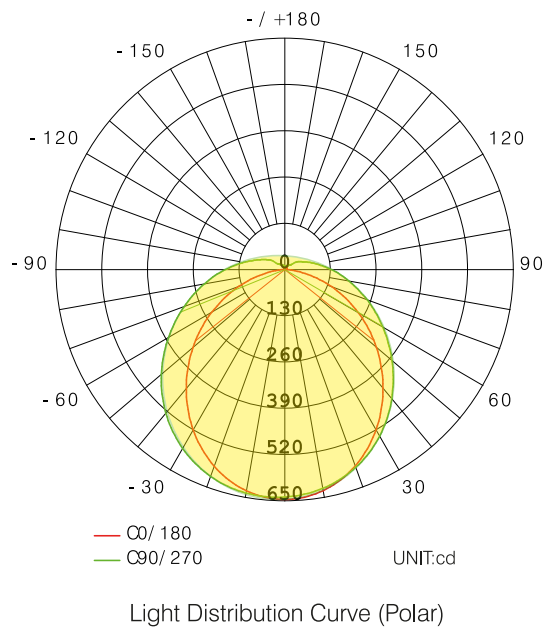

Dimensions & Weight

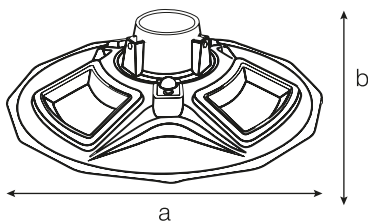


a b
 420mm 120mm

Weight
 2135g

Packaging Data

Product Code	Units per Box (pcs)	Units per Carton (pcs)	Dimensions (width x length x height) (mm)	Weight (kg)
9371	1	5	200 x 545 x 170	18.1

Remote Control Pin Diagram

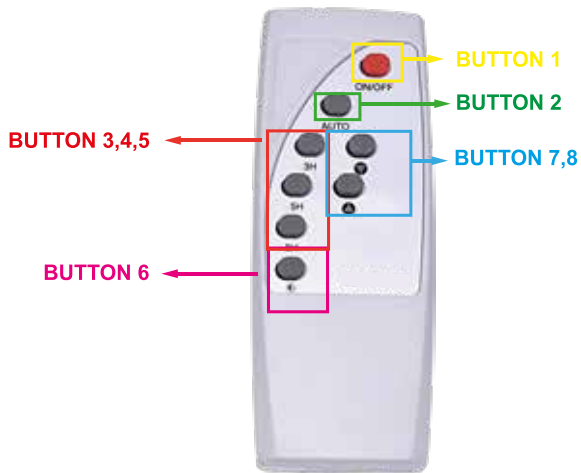

<p>BUTTON 1 ON/OFF</p>	
<p>BUTTON 2 AUTO MOD</p> <p>In this mode, when the sensor detects, the product works with 100% light. When the sensor is not detects, the product works with %30 light.</p>	
<p>BUTTON 3,4,5</p> <p>The product stays on during the specified time intervals. (2 Hour, 5 Hour, 8 Hour)</p>	
<p>BUTTON 7,8</p> <p>It is dimmed in 4 steps.</p>	
<p>BUTTON 6</p> <p>Sensor disabled mode, Sensor is deactivating, The product starts working when at night.</p>	

300W LED SOLAR PARK LUMINAIRE

9372

Areas of Usage

- Garden
- Car Parks
- Sports Areas
- Streets



General Features

Housing Material	: ABS Plastic
Product Color	: RAL 9005
Impact Resistance	: IK06
IP Rating	: IP65
Operating Temperature	: -25°C ~ +50°C
LED Lifespan	: 30.000 h
Product Lifespan	: 30.000 h
Sensor & Sensing Distance	: Motion Sensor 360° & 5-8m
Dimmability	: Dimmable
Mounting Type	: Pole Mounted

Solar Panel Features

Panel Type	: Polycrystalline
Panel Voltage	: 5V
Panel Power	: 20W
Control Unit	: Remote Control


Electrical Features

Power	: 300 W
Battery Type	: LiFePo4
Battery Voltage	: 3.2V
Battery Capacity	: 20000mA
Charging Time	: 6 - 7 h
Operating Time	: 12 - 16 h
Protection Class	: III


According to EU 2019/2015 Energy efficiency directive, there is a tolerance of ±10% for power and luminous flux values.

Optical Features

Luminous Flux : 1250 lm
 Color Rendering Index CRI : ≥ 80
 Beam Angle : 120°
 Light Source : Mid Power LED
 Color Temperature : 6500K

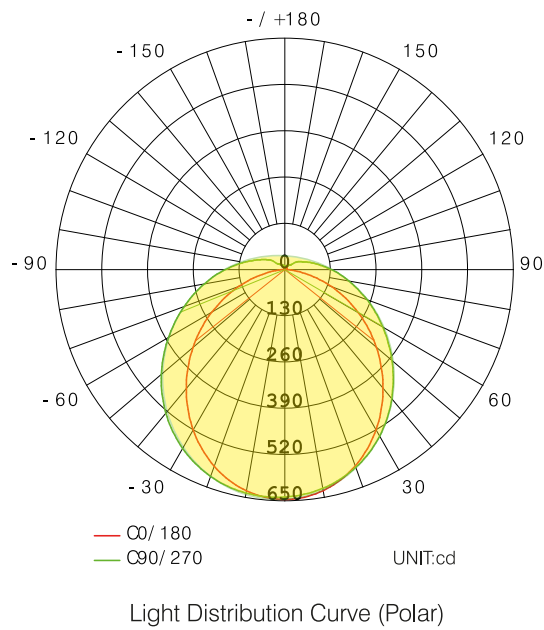

Dimensions & Weight

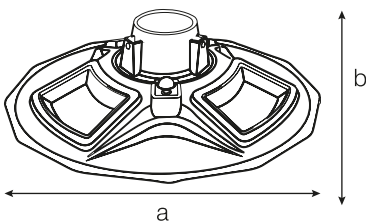


a b
 550mm 120mm

Weight
 2450g

Packaging Data

Product Code	Units per Box (pcs)	Units per Carton (pcs)	Dimensions (width x length x height) (mm)	Weight (kg)
9372	1	5	200 x 660 x 170	22.45

Remote Control Pin Diagram

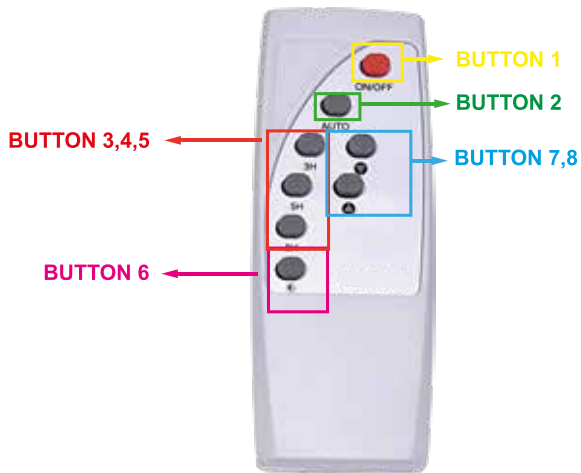

<p>BUTTON 1 ON/OFF</p>	
<p>BUTTON 2 AUTO MOD</p> <p>In this mode, when the sensor detects, the product works with 100% light. When the sensor is not detects, the product works with %30 light.</p>	
<p>BUTTON 3,4,5</p> <p>The product stays on during the specified time intervals. (2 Hour, 5 Hour, 8 Hour)</p>	
<p>BUTTON 7.8</p> <p>It is dimmed in 4 steps.</p>	
<p>BUTTON 6</p> <p>Sensor disabled mode, Sensor is deactivating, The product starts working when at night.</p>	