

VERTA

36W SENSOR LED BATTEN LUMINAIRE

2915



Areas of Usage

- Car Parks
- Hospitals
- Schools

General Features

Housing Material	: Polycarbonate
Diffuser Material	: Opal Polycarbonate
Cap Material	: Polyamide
Product Color	: RAL 9016
Impact Resistance	: IK05
IP Rating	: IP40
Operating Temperature	: -20°C ~ +40°C
LED Lifespan	: 50.000 h - L70 @ Ta= 40°C
Product Lifespan	: 30.000 h
Dimmability	: Non-Dimmable
Mounting Type	: Surface Mounted

Sensor Features

Sensor Type	: IR Sensor
Sensing Area	: 6m
Sensing Angle	: 360°
Sensing Height	: 2,2 - 4m



Electrical Features

Power	: 36 W
Input Voltage	: 220-240V AC
Input Frequency	: 50/60 Hz
Power Factor	: $\geq 0,5$
Protection Class	: II

According to EU 2019/2015 Energy efficiency directive, there is a tolerance of $\pm 10\%$ for power and luminous flux values.

Optical Features

Luminous Flux : 3600 lm
 Luminous Efficacy : 100 lm/W
 Color Rendering Index CRI : ≥80
 Beam Angle : 120°
 Light Source : Mid Power LED
 Color Temperature : 6500K

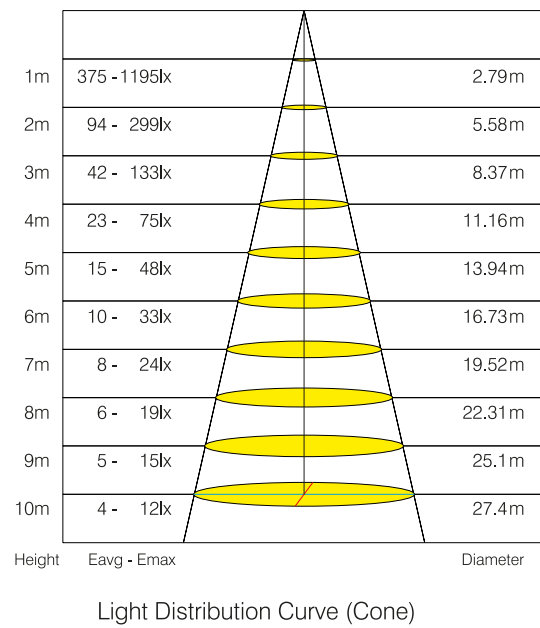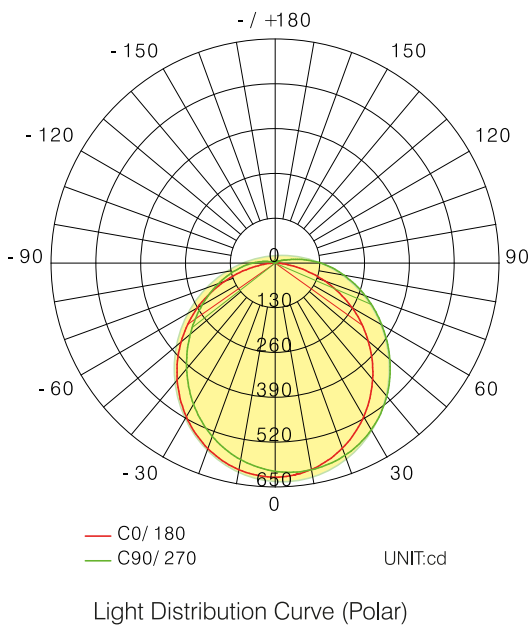

Dimensions & Weight




a	b(h)	c	Weight
68mm	26mm	1200mm	300g

Suspension Set



Cable Length



Packaging Data

Product Code	Units per Box (pcs)	Units per Carton (pcs)	Dimensions (width x length x height) (mm)	Weight (kg)
2915	1	30	295 x 1245 x 240	10,85

Color Temperature Options

Product Code	Color Temperature (Kelvin)	Luminous Flux (lm)
2915-01	6500	3600