

## 32W SURFACE MOUNTED LINEAR LED LUMINAIRE

5320



### Areas of Usage

- Gallery
- Offices
- Shopping Centers

### General Features

Housing Material	: Aluminum
Diffuser Material	: Opal Polycarbonate
Product Color	: RAL 9005, RAL 9006, RAL 9016
Impact Resistance	: IK0,2Nm
IP Rating	: IP20
Operating Temperature	: -20°C ~ +40°C
LED Lifespan	: 50.000 saat - L70 @ Ta= 40°C
Product Lifespan	: 50.000 h
Dimmability	: Non-Dimmable
Mounting Type	: Surface Installation


### Electrical Features

Power	: 32 W
Input Voltage	: 220-240V AC
Input Frequency	: 50/60 Hz
Power Factor	: $\geq 0,9$
Protection Class	: II

### Optical Features


Luminous Flux	: 4700 lm
Luminous Efficacy	: 145 lm/W
Color Rendering Index CRI	: $\geq 80$
Beam Angle	: 120°
Light Source	: Mid Power LED
Color Temperature	: 6500K
Photobiological Safety Group	: RG1

*According to EU 2019/2015 Energy efficiency directive, there is a tolerance of  $\pm 10\%$  for power and luminous flux values*

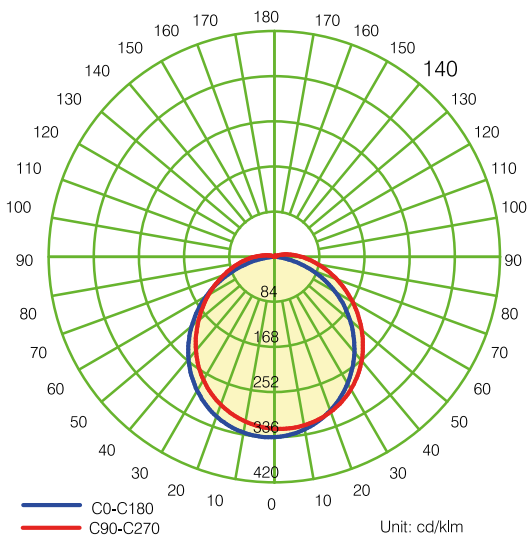


Light Distribution Curve (Polar)

Dimension & Weight

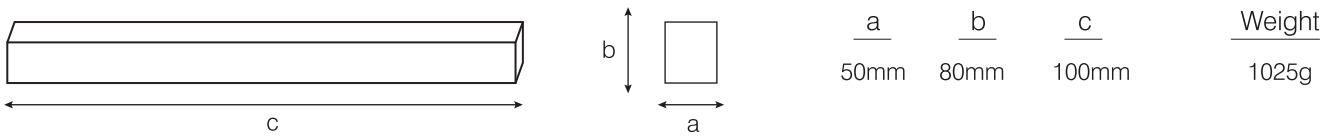

Cable Length



Packaging Data

Product Code	Units per Box (pcs)	Units per Carton (pcs)	Dimesions (width x length x height) (mm)	Weight (kg)
5320	1	24	60 x 1100 x 110	1.15

Color Temperature Options

Product Code	Color Temperature (Kelvin)	Luminous Flux (lm)
5320-01	6500	4700
5320-02	3000	4610
5320-03	4000	4700